Picasso




JAPAN CERAMICS


26 Daisy Street
Revesby NSW 2212
P 02 9772 2088
E sales@japanceramics.com.au
japanceramics.com.au





200 x 200mm
PIC704 (matt)

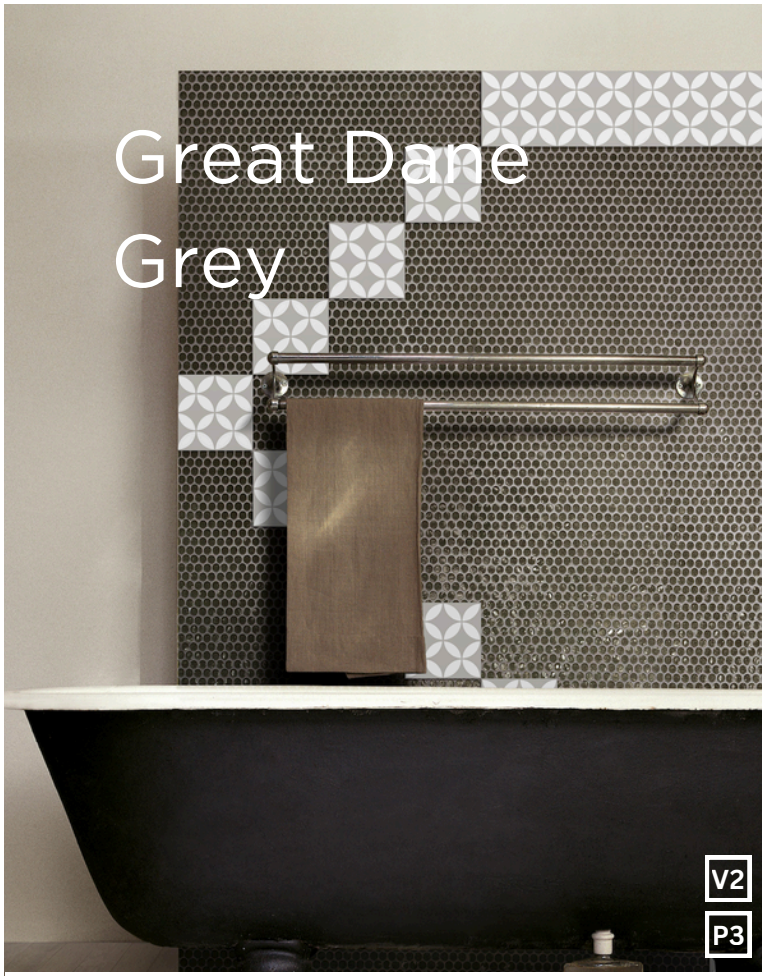



200 x 200mm
PIC312 (matt)


JAPAN CERAMICS





200 x 200mm
PIC2014 (matt)





200 x 200mm
PIC205 (matt)

JAPAN CERAMICS

Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
Water absorption	GB/T 4100-2015	⩽ 0.5%	2.20%	Full range
Determination of dimensions	GB/T 4100-2015	⩾ 1100 N	1585 N	Full range
Breaking strength	GB/T 4100-2015	Minimum 35 MPa	38 MPa	Full range
Abrasion resistance	GB/T 4100-2015	Class 3 min.	Class 3	Full range
Chemical resistance	GB/T 4100-2015	Minimum UB	GA, GLA, GHA	Full range
Stain resistance	GB/T 4100-2015	Minimum class 3	Class 5	Full range
Origin	N/A	N/A	China	Full range
Shade variation	N/A	N/A	V1	Full range



JAPAN CERAMICS

Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
200 x 200	Matt	25	25.00	17.00kg	72.00	72



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

JAPAN CERAMICS